

Ultrasonic sensor

UB2000-30GM-U-V1

Technical data

General Specifications

Sensing distance	160...2000mm
Adjustment range	200...2000mm
Unusable area	0...200mm
Standard target plate	100mm×100mm
Transducer frequency	About 112kHz
Response delay	About 195ms

Indicators/Operating means

LED blue	Power on
LED yellow	indication of the switching state
LED red	Flashing:program function object detected permanently red: Error Red,flashing:program function,object not detected

Electrical specifications

Operating voltage U_B	10...30VDC,ripple10%ss
Power consumption P_0	≤900 mW

Output



Output type	1 analogue output 0...10V
Resolution	evaluation range [mm]/4000, but ≥ 0.35 mm
Deviation of the characteristic curve	≤0.2% of full-scale value
Repeat accuracy	≤0.1% of full-scale value
Load impedance	0...500 Ohm
Temperature influence	≤2% from full-scale value

Ambient conditions


Ambient temperature	-25...70°C
Storage temperature	-40...85°C

Mechanical specifications

Protection grade	IP67
Connection	Connector M12x1,4-PIN
Material	
Housing	brass,nickel-plated
Transducer	epoxy resin/hollow glass sphere mixture; Polyurethane foam
Weight	60g

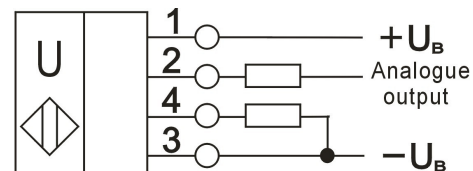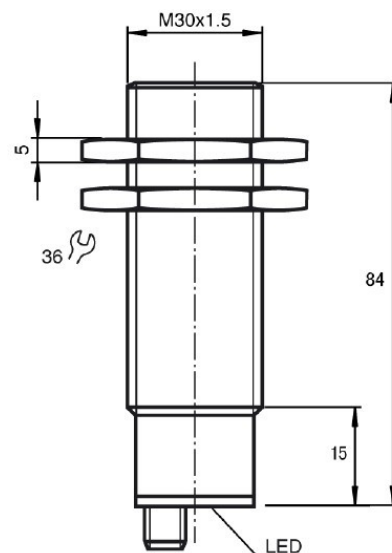

V1 Connector



External synchronization

The sensor can be synchronised by the external application of a square wave voltage. A synchronisation pulse at the synchronisation

input starts a measuring cycle. The pulse must have a duration greater than 100 μ s. The measuring cycle starts with

the falling edge of a synchronisation pulse. A low level > 1 s or an open synchronisation input will result in the normal operation

of the sensor. A high level at the synchronisation input disables the sensor. Two operating modes are available:

1. Multiple sensors can be controlled by the same synchronisation signal. The sensors are synchronised.
2. The synchronisation pulses are sent cyclically to individual sensors. The sensors operate in multiplex mode.

Internal synchronization

The synchronisation connections of up to 5 sensors capable of internal synchronisation are connected to one another. When power is applied, these sensors will operate in multiplex mode.

The response delay increases according to the number of sensors to be synchronised. Synchronisation cannot be performed during TEACH-IN and vice versa. The sensors must be operated in an unsynchronised manner to teach the evaluation limits.

Note:

If the option for synchronisation is not used, the synchronisation input has to be connected to ground (0V) or the sensor has to be operated via a V1 cable connector (4-pin).

Adjusting the evaluation limits

The ultrasonic sensor features an analogue output with two teachable evaluation limits. These are set by applying the supply voltage - U_B or + U_B to the TEACH-IN input. The supply voltage must be applied to the TEACH-IN input for at least 1 s. LEDs indicate whether the sensor has recognised the target during the TEACH-IN procedure. The lower evaluation limit A1 is taught with - U_B , A2 with + U_B .

Two different output functions can be set:

1. Analogue value increases with rising distance to object (rising ramp)
2. Analogue value falls with rising distance to object (falling ramp)

Evaluation limits may only be specified within the first 5 minutes after Power on. To modify the evaluation limits later, the user may specify the desired values only after a new Power On.

TEACH-IN rising ramp ($A2 > A1$)

- Position object at lower evaluation limit
- TEACH-IN lower limit A1 with - U_B

- Position object at upper evaluation limit
- TEACH-IN upper limit A2 with + U_B

TEACH-IN falling ramp ($A1 > A2$):

- Position object at lower evaluation limit
- TEACH-IN lower limit A2 with + U_B
- Position object at upper evaluation limit
- TEACH-IN upper limit A1 with - U_B


Default setting

A1: unusable area


A2: nominal sensing range

Mode of operation: rising ramp

Characteristic response curve

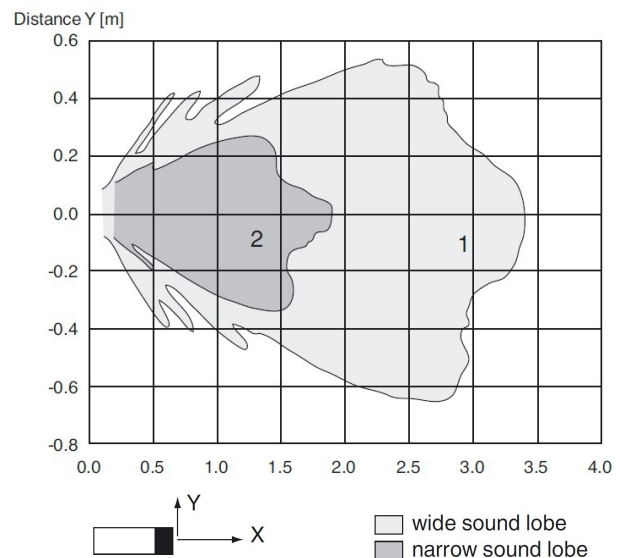

Programmed analogue output function

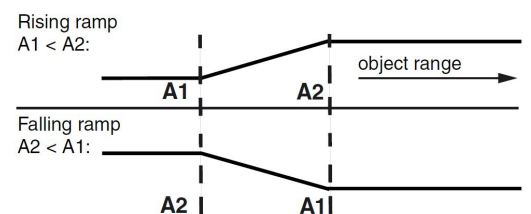

LED Displays


Displays in dependence on operating mode	Red LED	Yellow LED
TEACH-IN evaluation limit		
Object detected	off	flashes
No object detected	flashes	off
Object uncertain (TEACH-IN invalid)	on	off
Normal mode (evaluation range)	off	on
Fault	on	previous state

Adjusting the sound cone characteristics:

The ultrasonic sensor enables two different shapes of the sound cone, a wide angle sound cone and a small angle sound cone.


1. Small angle sound cone

- switch off the power supply
- connect the Teach-input wire to -UB
- switch on the power supply
- the red LED flashes once with a pause before the next.
- yellow LED: permanently on: indicates the presence of an object or disturbing object within the sensing range
- disconnect the Teach-input wire from -UB and the changing is saved



2. Wide angle sound cone

- switch off the power supply
- connect the Teach-input wire with + UB
- switch on the power supply
- the red LED double-flashes with a long pause before the next.
- yellow LED: permanently on: indicates an object or disturbing object within the sensing range
- disconnect the Teach-input wire from + UB and the changing is saved



Installation conditions

If the sensor is installed at the environment temperature fall below 0°C, It should do well on the protective measures. In case of direct mounting of the sensor in a through hole using the steel nuts, it has to be fixed at the middle of the housing thread.