


## SFT-V Couplings



### Type Remarks:

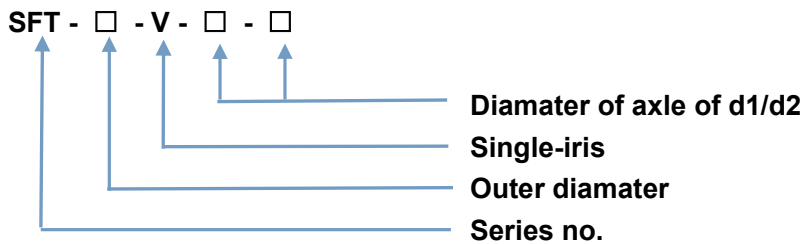

### 1. Aluminium flexible coupling introduction:

Aluminium flexible couplings are offered in the industry's largest variety of stock bore/keyway combinations. These couplings require no lubrication and provide highly reliable service for light, medium, and heavy duty electrical motor and internal combustion power transmission applications. Applications include power transmission to industrial equipment such as pumps, gear boxes, compressors, blowers, mixers, and conveyors.

### 2. Our aluminium flexible coupling details are as follow:



1. Material: Aluminium alloy or steel, TPU, NBR rubber etc.
2. Elastic Spider: Three type of Elastic Spider can be choosed 86SH. A 92SH. A 98SH. A
3. Surface treatment: black finished / Anodizing.
4. High sensitivity High torque rigid Zero backlash.
5. Type of shaft lock: Setscrew or Clamp type.
6. Rotation character of clockwise or anti-clockwise are exactly the same.
7. Coupling assembled by pressing a polyurethane sleeve into hubs on both sides.

### 3. Our Features:

1. Zero backlash.
2. Small volume and large transmitted torque.
3. Free maintenance, oil-resist and anti-corrosiveness.
4. Easy pulling out and install.
5. Stock to ensure a prompt delivery within one week.
6. High-performance with competitive prices.

**4: Coupling sizes:**

Model	The inner diameter of the sheft diameter		D	L	L1	L2	L3	W	K	M	Tightening torque [N.m]
	Min	Max									
SFT-34V	5	10	34	21.6	27.35	4.0	12	3.35	8.0	M3	1.5
SFT39V	6	12	39	24.6	34.35	5.0	15	4.35	8.5	M4	3.4
SFT-44V	8	16	44	29.6	34.6	5.0	15	4.60	11.0	M4	3.4
SFT-56V	10	20	56	38	45.25	6.6	20	5.25	14.5	M5	7.0
SFT-68V	12	25	68	46	53.8	7.6	24	5.80	17.5	M6	14.0
SFT-82V	14	30	82	56	68	9.3	30	8.00	20.0	M8	30.0

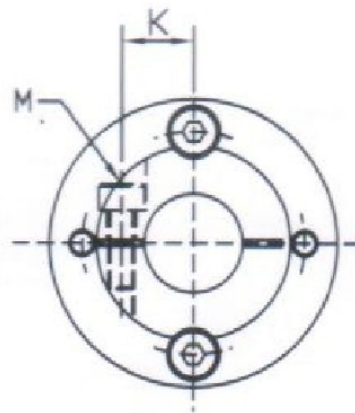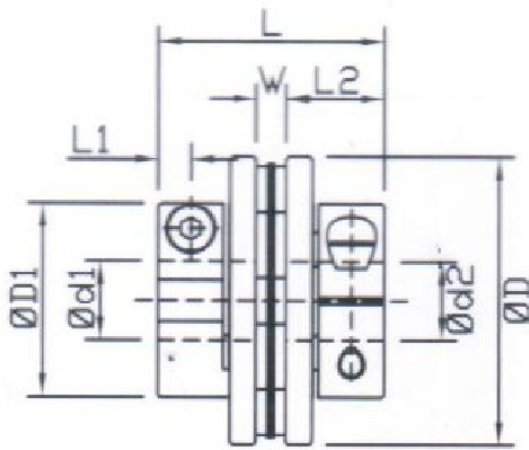

**5: Technical date:**

Model	Rated torque		Maximum Speed [r/min]	Inertia moment [kg-m <sup>2</sup> ]	Static torque rigidity [N.m/rad]	Maximum allowed deviation			Weight [g]
	Nominal [N.m]	Max [N.m]				Radial direction [mm]	Angle [.]	Axial [mm]	
SFT-34V	4	8	10000	$4.00 \times 10^{-6}$	2000	0.02	1	$\pm 0.20$	30
SFT39V	6	12	10000	$1.18 \times 10^{-5}$	4500	0.02	1	$\pm 0.25$	55
SFT-44V	10	20	10000	$1.65 \times 10^{-5}$	5200	0.02	1	$\pm 0.30$	68
SFT-56V	25	50	10000	$5.50 \times 10^{-5}$	11000	0.02	1	$\pm 0.40$	147
SFT-68V	60	120	10000	$1.45 \times 10^{-4}$	19000	0.02	1	$\pm 0.45$	262
SFT-82V	100	200	10000	$4.79 \times 10^{-4}$	22000	0.02	1	$\pm 0.55$	470