




- Using CMOS IC, high reliability and stability
- High repeat accuracy $\pm 1\%$
- Large transparent for easy adjustment and monitor
- Two LED'S provides status indication for power ON and time UP
- Offered in a wide range of AC or DC operating voltage
- Wide variety of 15 time ranges (0.1sec to 24hrs)

SPECIFICATIONS

FULL TIME RANGE		SEC: 1, 2, 3, 6, 10, 30, 60 MIN: 3, 6, 10, 30, 60 H R: 3, 6, 10, 24		
RATED VOLTAGE		DC(V): 12, 24, 48 AC(V): 12, 24, 48, 110, 220, 240, 380, 415, 440, 50/60Hz		
INDICATOR OPERATING		ON-UP Two indicator lamp		
o/p C O N T A C T	MODEL	AH2-N1/AH2-Y1	AH2-N2/AH2-Y2	AH2-N/AH2-Y
	TIME LIMIT 1C	5A		5A
	TIME LIMIT 2C		5A	
	INSTANTANEOUS 1C			5A
LIFE	MECHANICAL	5 x 10 ⁶ times		
	ELECTRICAL	10 ⁵ times		
RESET TIME		0.1 sec max		
CONSUMED POWER		2VA		
AMBIENT TEMPERATURE		-10°C~ + 55°C		
AMBIENT HUMIDITY		45~85%RH		
WEIGHT		Approx. 220g		

CONNECTION DIAGRAMS & TIMING CHARTS

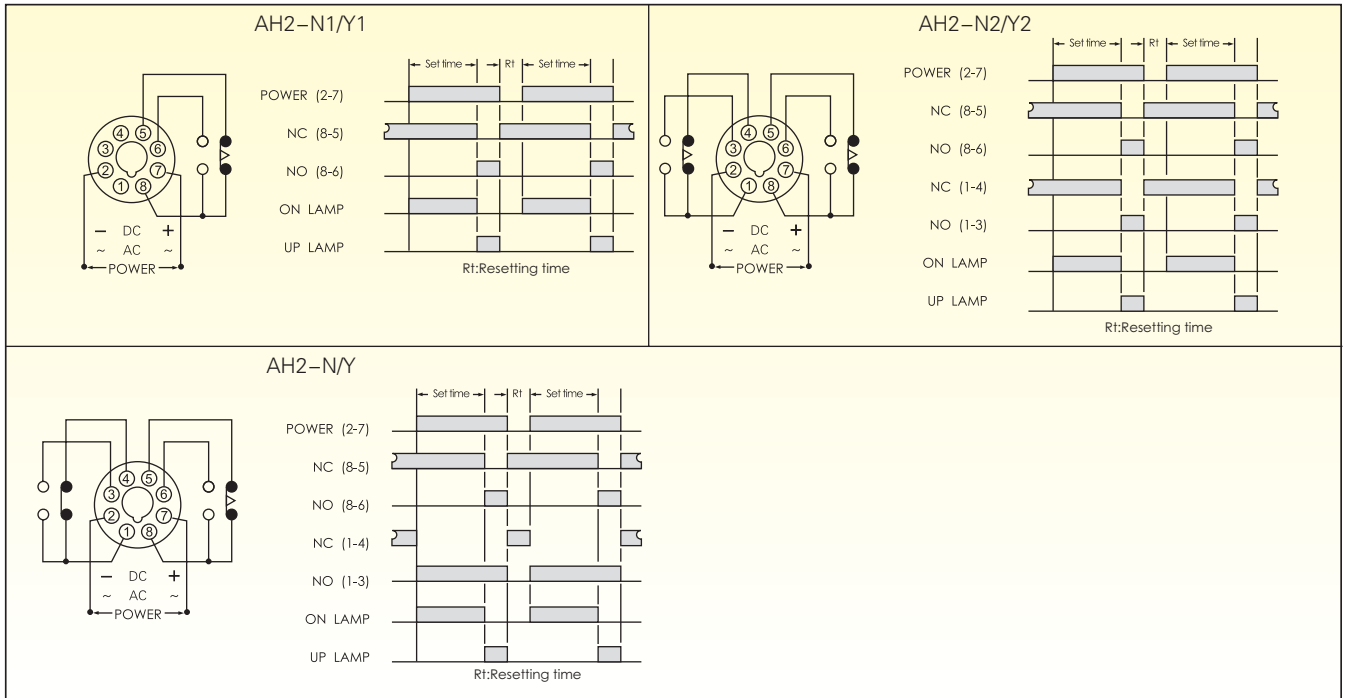

DIMENSION

