




- DIN Size W48 x H48mm
- Using CMOS IC, Accurate and stable operation
- Offered in a wide range of AC or DC operating voltage
- Wide variety of 15 time ranges (0.1sec to 24hrs)
- Output contact 2C delay or 1C delay with 1C instantaneous can select by pushing "MODE" switch to A or B
- Bi-Color LED provides status indication for power ON and time UP
- Flush mount with Type Y-50+P3G-08 and Surface mount with Type P2CF-08 Socket

SPECIFICATIONS

FULL TIME RANGE		SEC: 1, 3, 6, 10, 30, 60 MIN: 3, 6, 10, 30, 60 H R: 3, 6, 10, 24	
RATED VOLTAGE		DC(V): 12, 24, 48 AC(V): 12, 24, 48, 110, 220, 240, 380, 415, 440, 50/60Hz	
INDICATOR OPERATING		ON-Green UP-Red	
o/p C O N T A C T	MODEL	mode A	mode B
	TIME LIMIT 1C		5A
	TIME LIMIT 2C	5A	
	INSTANTANEOUS 1C		5A
LIFE	MECHANICAL	5 x 10 ⁶ times	
	ELECTRICAL	10 ⁵ times	
RESET TIME		0.1 sec max	
CONSUMED POWER		2VA	
AMBIENT TEMPERATURE		-10°C~ +55°C	
AMBIENT HUMIDITY		45~85%RH	
WEIGHT		Approx. 170g	

CONNECTION DIAGRAMS & TIMING CHARTS

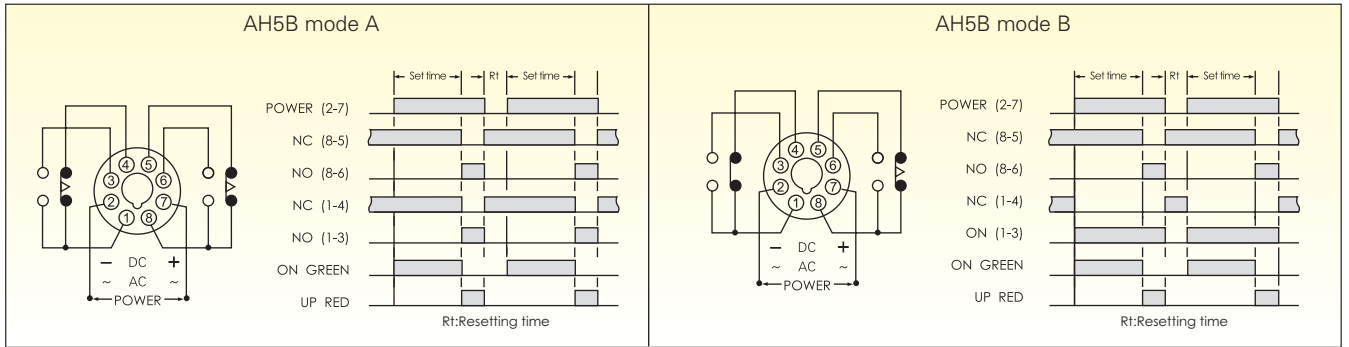

DIMENSION

